


Extruded Aluminum Stationary Drainable Blade Louver 6" Deep

Model: FPCB Channel Frame, FTCB Flanged Frame

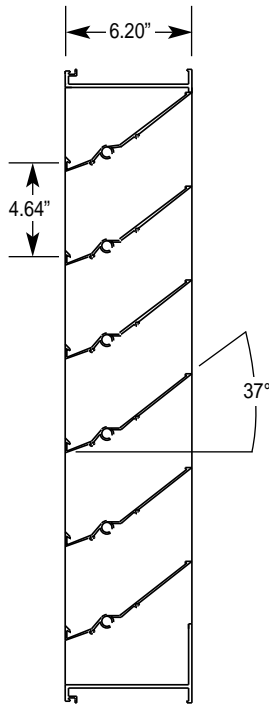

Section View

Model FPCB

▼ Standard Specifications

Frame: .125 extruded aluminum, 6.20" deep

Blades: .081 extruded aluminum positioned on a 37° angle on approximately 4.64" centers


Finish: mill aluminum (standard)

Screen: 3/4" x .051" flattened aluminum in removable frame. Screen is mounted as standard on inside (rear) as looking from exterior of building.


Maximum Panel Size: 84"w x 120"h or 120"w x 84"h

Minimum Panel Size: 12"w x 12"h



Note: Drainable blade louvers should be limited to 10' maximum section widths (no more than 10' between vertical downspouts) to enable the drainable design to function effectively.



Flanged Frame
Optional



Extended Sill
Optional

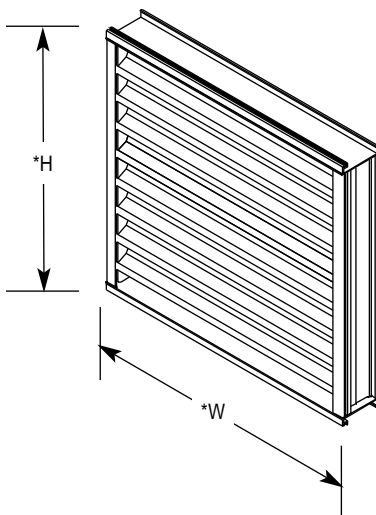

Glazing Adapter
Optional

*Width and height dimensions are approximately 1/4" under listed size.



The Carnes Company certifies that the model FPCB/FTCB louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.


Model FPCB and FTCB

Free Area in Square Feet

HEIGHT INCHES	WIDTH IN INCHES																		
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
12	0.24	0.38	0.53	0.68	0.83	0.98	1.13	1.27	1.42	1.57	1.72	1.87	2.02	2.16	2.31	2.46	2.61	2.76	2.91
18	0.46	0.75	1.04	1.34	1.63	1.92	2.21	2.50	2.79	3.08	3.37	3.67	3.96	4.25	4.54	4.83	5.12	5.41	5.71
24	0.69	1.12	1.56	1.99	2.42	2.86	3.29	3.73	4.16	4.60	5.03	5.46	5.90	6.33	6.77	7.20	7.64	8.07	8.50
30	0.91	1.49	2.07	2.65	3.22	3.80	4.38	4.95	5.53	6.11	6.69	7.26	7.84	8.42	8.99	9.57	10.15	10.73	11.30
36	1.14	1.86	2.58	3.30	4.02	4.74	5.46	6.18	6.90	7.62	8.34	9.06	9.78	10.50	11.22	11.94	12.66	13.38	14.10
42	1.59	2.60	3.60	4.61	5.62	6.62	7.63	8.63	9.64	10.65	11.65	12.66	13.66	14.67	15.68	16.68	17.69	18.69	19.70
48	1.82	2.97	4.12	5.27	6.41	7.56	8.71	9.86	11.01	12.16	13.31	14.46	15.61	16.75	17.90	19.05	20.20	21.35	22.50
54	2.05	3.34	4.63	5.92	7.21	8.50	9.80	11.09	12.38	13.67	14.96	16.25	17.55	18.84	20.13	21.42	22.71	24.01	25.30
60	2.27	3.71	5.14	6.58	8.01	9.45	10.88	12.31	13.75	15.18	16.62	18.05	19.49	20.92	22.36	23.79	25.23	26.66	28.10
66	2.50	4.08	5.65	7.23	8.81	10.39	11.96	13.54	15.12	16.70	18.27	19.85	21.43	23.01	24.58	26.16	27.74	29.32	30.89
72	2.72	4.44	6.17	7.89	9.61	11.33	13.05	14.77	16.49	18.21	19.93	21.65	23.37	25.09	26.81	28.53	30.25	31.97	33.69
78	2.95	4.81	6.68	8.54	10.40	12.27	14.13	15.99	17.86	19.72	21.58	23.45	25.31	27.18	29.04	30.90	32.77	34.63	36.49
84	3.40	5.55	7.70	9.85	12.00	14.15	16.30	18.45	20.60	22.75	24.90	27.04	29.19	31.34	33.49	35.64	37.79	39.94	42.09
90	3.63	5.92	8.21	10.51	12.8	15.09	17.38	19.67	21.97	24.26	26.55	28.84	31.14	33.43	35.72	38.01	40.30	42.60	44.89
96	3.86	6.29	8.73	11.16	13.60	16.03	18.47	20.90	23.34	25.77	28.21	30.64	33.08	35.51	37.95	40.38	42.82	45.25	47.69
102	4.08	6.66	9.24	11.82	14.39	16.97	19.55	22.13	24.71	27.28	29.86	32.44	35.02	37.60	40.17	42.75	45.33	47.91	50.49
108	4.31	7.03	9.75	12.47	15.19	17.91	20.63	23.35	26.08	28.80	31.52	34.24	36.96	39.68	42.40	45.12	47.84	50.56	53.29
114	4.53	7.40	10.26	13.13	15.99	18.85	21.72	24.58	27.45	30.31	33.17	36.04	38.90	41.76	44.63	47.49	50.36	53.22	56.08
120	4.76	7.77	10.77	13.78	16.79	19.79	22.80	25.81	28.81	31.82	34.83	37.84	40.84	43.85	46.86	49.86	52.87	55.88	58.88

Beginning point of WATER PENETRATION is 1250 fpm
free area velocity at .01 oz. of water penetration

Pressure Drop

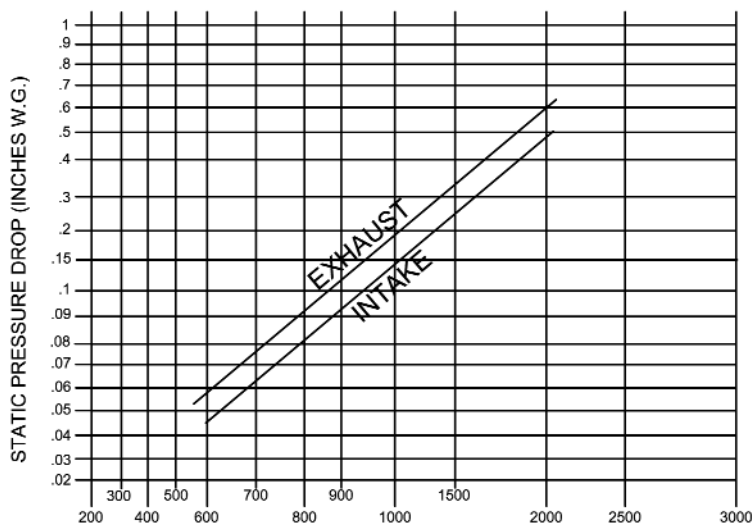

FREE AREA VELOCITY (FT/MIN)

Standard air - .075 lbs per cu ft
Ratings do not include the effects of a wire birdscreen
Test based on a 48" x 48" test size, 15 min test duration

Drainable Blade