# SUBMITTAL SHEET
## MODEL ACWJ
## J-SERIES FAN TERMINAL UNITS
## ECM FAN SIZES H & J

Imperial [IP] Dimensions
*Metric (SI) in Parentheses*

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

***FOR LARGER IMAGES AND DIMENSIONS, REFER TO SPECIFICATION/CUT SHEET.***

**FAN SIZES H & J**

**RIGHT HAND PRIMARY AIR UNIT AND COIL CONNECTIONS SHOWN. LEFT HAND AVAILABLE.**

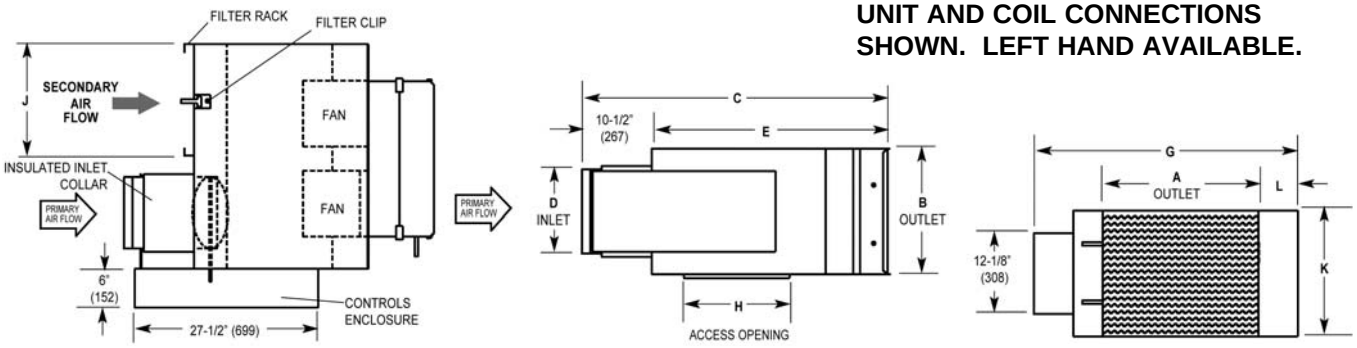


## STANDARD FEATURES:

- Right Hand Controls Arrangement
- 22 Gauge Galvanized Steel
- AHRI Certified
- Patented Tri-Averaging Inlet Sensor
- Insulated Inlet Collar
- Calibration Chart Located On Inlet
- Slip & Drive Discharge Connection
- 3/8" Damper Shaft With Position Indicator Rotating In Bronze Bearings
- Valaro Type "A" Gasketed Damper Blade
- Made In America
- Bottom Access Panel
- Contactor & Capacitor
- 1" Filter Rack
- ETL Listed
- NEMA Controls Enclosure
- Speed Dial (24 Volts Required)
- ECM Motor (Volt/Phase) _____

## OPTIONS:

**Insulation**

- ☐ 1" Matte Faced
- ☐ 1" Foil Faced
- ☐ 1/2" Closed Cell Foam
- ☐ Dual Wall With Solid Liner
- ☐ Dual Wall With Perforated Liner

**Controls**

- ☐ NEMA Controls Enclosure Only (Controls By Others)
- ☐ Controls Supplied By Others, Mounted By Factory
- ☐ Factory Supplied Analog Controls With Wall T'Stat
- ☐ Pneumatic Controls (T'Stat By Others)
- ☐ Left Hand Controls

**Miscellaneous**

- ☐ 24 Volt Transformer
- ☐ 1" Disposable Plenum Filter
- ☐ 1" Reusable Plenum Filter
- ☐ Non-Fused Disconnect Switch
- ☐ Fused Disconnect Switch
- ☐ Factory Mounted Secondary Inlet Attenuator
- ☐ ETL Labeled
- ☐ Special Construction _____
- ☐ Exceptions _____

**DIMENSIONS LISTED IN INCHES (Millimeters)**

| Fan Size | Inlet Size | Primary CFM (L/s) | Sec. CFM @ .25" E.S.P. (L/s) | Fan H.P. | Outlet A | Outlet B | 1 Row C | 2 Row C | Inlet D | 1 Row E | 2 Row E | G | H | J | K | L |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| H | 14 | 3100 (1462) | 3200 (1510) | 1 (2) | 42 (1067) | 17-1/2 (445) | 50-1/4 (1276) | 51-1/2 (1308) | 13-7/8 (352) | 39-3/4 (1010) | 41 (1041) | 56 (1422) | 17-3/4 (451) | 27-7/8 (708) | 18-1/4 (463) | 4 (102) |
| J | 16 | 4200 (1982) | 4200 (1982) | 1 (2) | | | | | 15-7/8 (403) | | | | | | | |

**Note:** Outlet is designed for slip and drive duct connection.

Job Name _____ Contractor _____

Architect _____ Submitted By _____

Engineer _____ Tag/Mark _____

COPYRIGHT © 2011 CARNES COMPANY
*ALL RIGHTS RESERVED*