



CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com


**VXCAF08 & VXCAC08**  
AIRFLOW PERFORMANCE

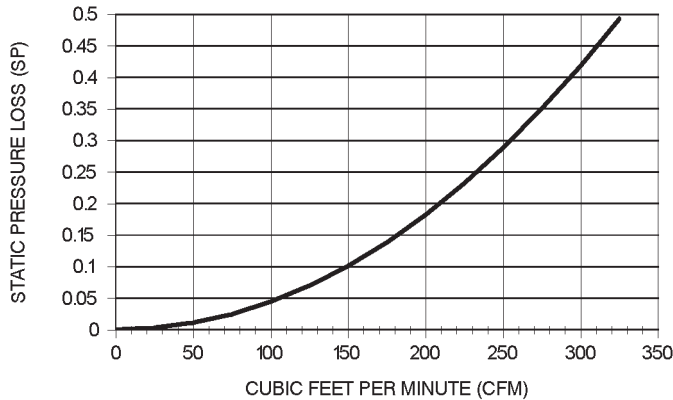


**VXCAF12 & VXCAC12**  
AIRFLOW PERFORMANCE

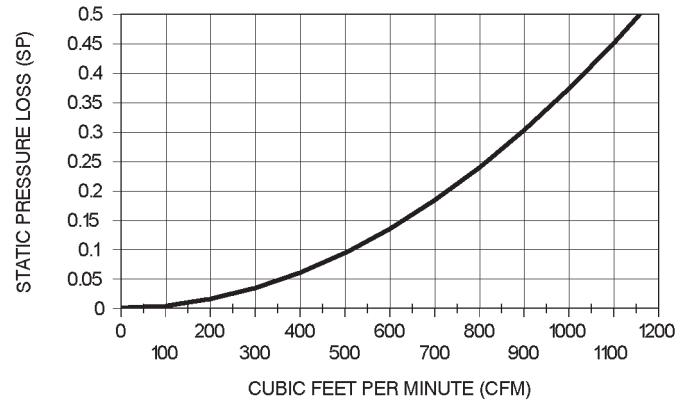

**VXCAF16 & VXCAC16**  
AIRFLOW PERFORMANCE

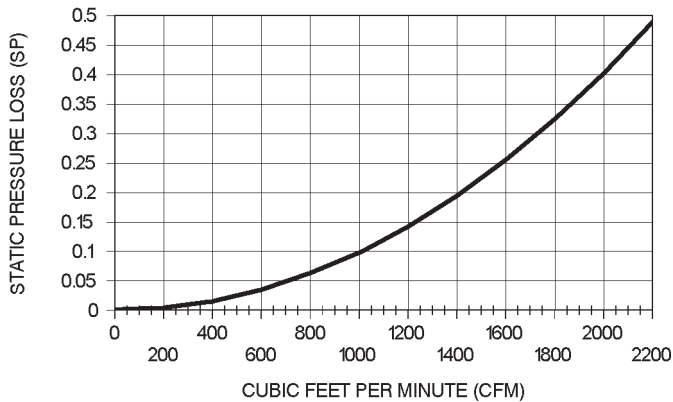

**VXCAF20 & VXCAC20**  
AIRFLOW PERFORMANCE

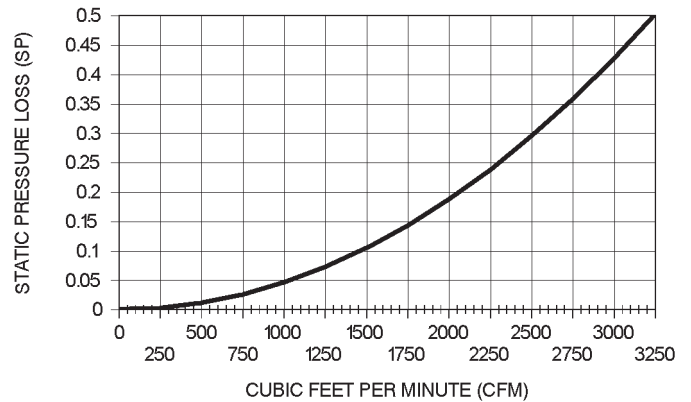

Airflow performance shown is static pressure drop for roof cap with inlet duct at standard air density. Test methods per ANSI/AMCA Standard 210-85 and ANSI/ASHRAE Standard 51-1985 were conducted in an AMCA Registered Laboratory.

### IP (English) to SI (Metric) Conversions

Quantity	To Convert From	To	Multiply By
Length	Inch (In.)	Millimeter (mm)	25.4
Air Flow	Cubic Ft./Min. (CFM)	Cubic Meters/Hr. (M <sup>3</sup> /Hr.)	1.699
	Cubic Ft./Min. (CFM)	Liters/Sec. (L/s)	0.47195
Pressure	Inches Water (In. WG.)	Pascals (Pa)	248.36
Velocity	Feet/Min. (FPM)	Meters/Sec. (M/S)	0.00508