

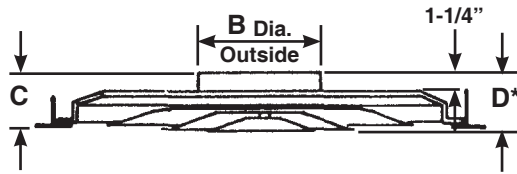


Imperial [IP] Dimensions
Metric (SI) in Parentheses

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com



*"D" dimension shown is vertical pattern. For horizontal pattern, ADD 5/8".

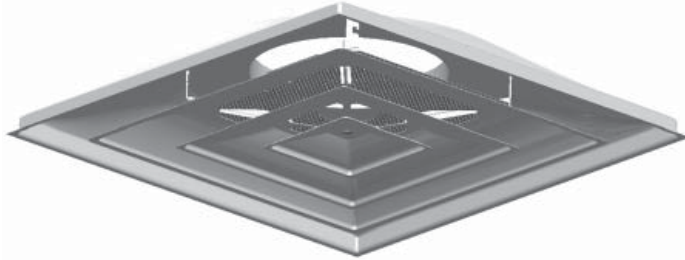

SIZE 12



SIZE 24

Notes:

1. The core is easily removable by compressing the locking spring and rotating the core counter clock-wise.
2. Adjustment between horizontal and vertical discharge is done by adjusting the pattern deflectors from flush with the cone to horizontal (parallel to the floor).
3. To gain access for damper adjustment, remove the center plug on the center cone of the core.
4. The standard finish is electrocoat acrylic baked enamel. Other finishes are available on request.
5. The standard color is #11 Bright White. Other colors are available upon request.
6. Perforated material is 21% free area on sizes 5-10, and 51% on sizes 12-14.
7. Inlet is 1/8" (3) undersized to fit into the duct.

Metric Dimensions are in Millimeters		
Model	Nominal Inlet Size	Inlet O. D. (Dim. B)
SJAB 2406	6" (152)	5-7/8" (149)
SJAB 2407	7" (178)	6-7/8" (175)
SJAB 2408	8" (203)	7-7/8" (200)
SJAB 2410	10" (254)	9-7/8" (251)
SJAB 2412	12" (305)	11-7/8" (302)
SJAB 2414	14" (356)	13-7/8" (352)