


**Imperial [IP] Dimensions**  
**Metric (SI) in Parentheses**

CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com

### CANTED INSULATED ROOF CURB

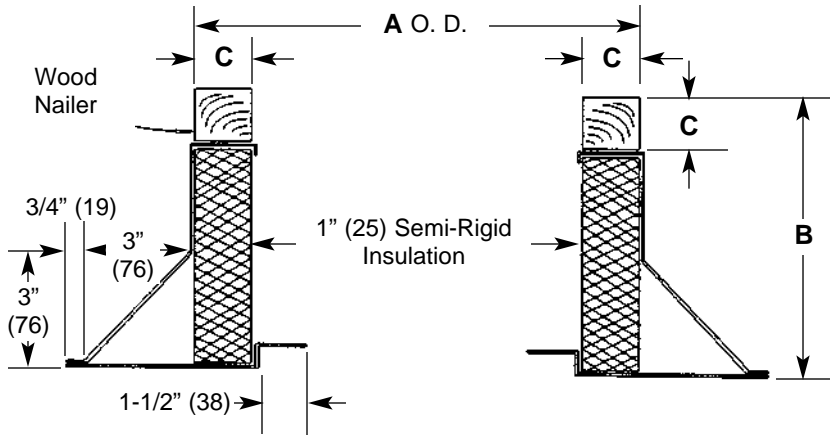

#### OPTIONS:

1. Insulation retainers - solid or screen type.
2. Burglar bars - 1/2" dia. on 8" centers.  
or, 3/4" dia. on 6" centers.
3. Heights: 8, 12, or 16".
4. Single pitch, double pitch, or flat style.
5. Damper tray.

#### DIMENSIONS LISTED IN INCHES (Millimeters)

Fan Size	A" O. D. (Square) CURB / RF TYPE			"B" Curb Height	"C" Wood Nailer	Gauge	Weight Lbs./Kg.
	LUBA54+ LUDA LUKA	LQBA	LGBA/DA LTBA/DA LFBA/DA				
24	31 (787)	33-1/4 (844)	33-1/4 (844)	8 (203)	1-1/2 (38)	18	39 (18)
30	37 (939)	39-1/4 (997)	39-1/4 (997)	8 (203)	1-1/2 (38)	18	46 (21)
36	43 (1092)	45-1/4 (1149)	45-1/4 (1149)	8 (203)	1-1/2 (38)	18	54 (25)
42	49 (1244)	51-1/4 (1301)	51-1/4 (1301)	8 (203)	1-1/2 (38)	18	61 (28)
48	55 (1396)	57-1/4 (1453)	57-1/4 (1453)	8 (203)	1-1/2 (38)	18	68 (31)
54	61 (1549)	63-1/4 (1606)	63-1/4 (1606)	8 (203)	1-1/2 (38)	18	75 (34)
60	67 (1701)	69-1/4 (1758)	69-1/4 (1758)	8 (203)	1-1/2 (38)	18	82 (37)
72	81 (2056)	83-1/4 (2113)	83-1/4 (2113)	8 (203)	1-1/2 (38)	18	99 (45)

Standard construction is shown.  
 G-90 galvanized welded steel construction.