

Imperial [IP] Dimensions  
Metric (SI) in Parentheses


CARNES COMPANY 448 S. Main St., P. O. Box 930040, Verona, WI 53593-0040 Phone: (608)845-6411 Fax: (608)845-6504 www.carnes.com




#### Description

20 Amp, 120/277 Volt, Toggle Double-Pole AC Quiet Switch, Commercial Spec Grade, Grounding, Back & Side Wired, with Junction Box and Cover.

#### Dimensional Diagram

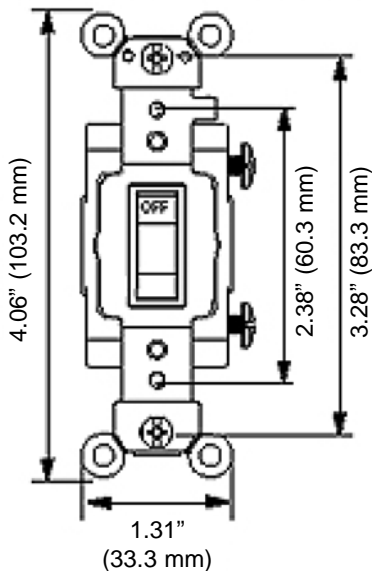

#### Wiring Diagram Double Pole

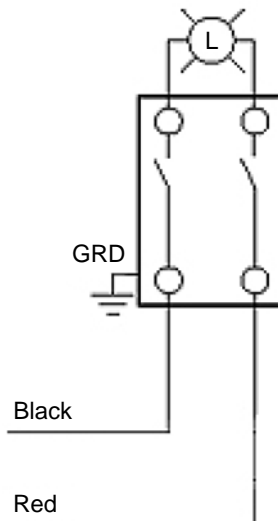

AC Horsepower Ratings	
HP Rating	1HP-120V, 2HP-240V

Environmental Specifications	
Flammability	Rated V-2 per UL 94
Operation Temperature	-40°C to 65°C

Mechanical Specifications	
Terminal ID	Brass - Hot, Green - Ground, Silver - Neutral
Terminal Accom.	14-10# AWG back wired; #14-#12 AWG side wired
Termination	Back & Side
Product ID	Stamped on Strap
Torque Range	12-14 inch pounds

Electrical Specifications	
Amperage	20 Amp
Voltage	120/277 Volt
Max. Amperage	16 Amp
Dielectric Voltage	Withstands 1500V for 1 minute
Temperature Rise	Maximum 30°C rise

Material Specifications	
Body Material	Thermosplastic
Base Material	PBT
Strap Material	Steel
Actuator Material	Polycarbonate
Toggle	Polycarbonate
Cover Material	Nylon
Contacts	Silver-Cadmium .031 Thick
Terminal Screws	Steel 8-32
Color	Ivory

Standards and Certifications	
NEMA	WD-1 & WD-6
ANSI	C-73
UL Fed Spec WS896E	File #E7458
UL Standard	UL 20
CSA C22.2 No. 111	File #152105
NOM	057